



BETTENERGY



ELESHELL5K

LIWATT CONTEMPORARY AMPEREX TECHNOLOGY CO.,LTD.

◆ Low voltage floor/wall mounted home storage lithium battery



UN38.3 IEC CE



» Long service life




» Supports multiple parallel connections for capacity increase



» Supports multiple inverter communications



» 5/10 year warranty

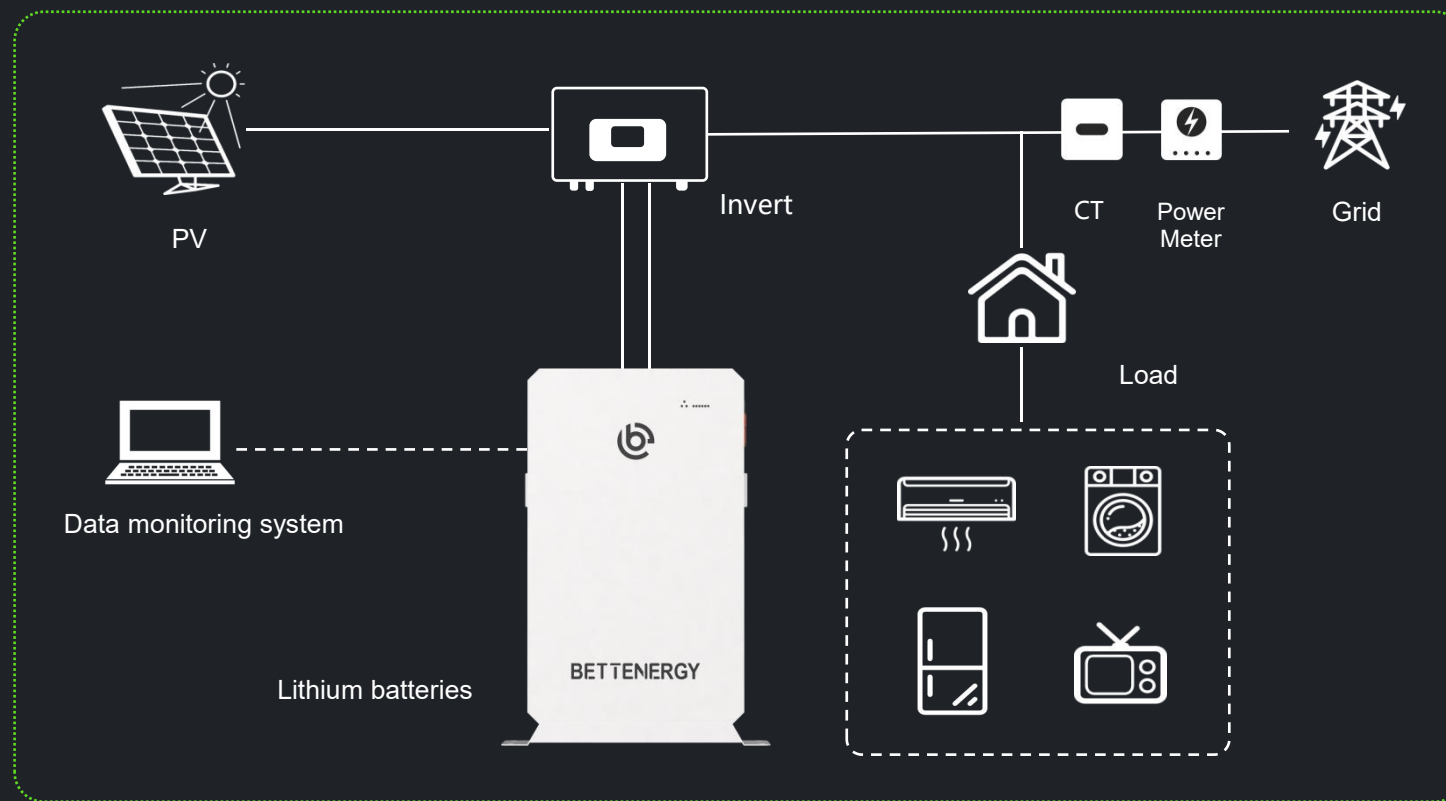

◆ Low-voltage floor/wall mounted home storage lithium battery



Model	ELESHELL5K
Battery Capacity(wh)	5120
Number of cells	1P8S*2
Cell Type	LFP
Nominal Voltage (V)	51.2
Operating Voltage Range (V)	46.4~57.6
Max.Charge /Discharge Current (A)	75/100
Continuous Charging/Discharging Current (A)	65/80
Max.charge/discharge Power (W)	3840/5120
Dimension (H*W*D mm)	610*370*163
Weight (KG)	44
Operating Temperature Range (℃)	0-55
Temperature.Control	natural cooling
Max.Number of Parallel	15
Communication	RS232 / RS485 / CAN
Cycle Life (80%DOD,25℃)	>6000
Ingress Protection Rating	IP54
Installation	Wall or floor mounting
Relative Humidity	≤95%rh No condensation
Humidity of storage environment	≤95%rh No condensation
Max. Operating Altitude (m)	≤3000m
Storage Temperature	≤25℃, 12 months; ≤35℃, 6 months; ≤45℃, 3 months
Certification	UN38.3,CE,IEC62619

Contact Us



400-678-6679



sales@bettenergy.com



www.bettenergy.com



Sanming Production Center: 4th Floor, Building 2, Intelligent Manufacturing Industrial Park, Gongye South Road, Ninghua County, Sanming City, Fujian Province, China



BETTENERGY